



MAC4

GB *USER'S MANUAL*

*COMPACT ACTIVE SPEAKER
350 W RMS MOSFET POWER AMPLIFIER
AUDIO PROCESSOR
ELECTRONIC LIMITER*

DIGITAL VOICE RESEARCH

*CODEM MUSIC S.r.l. - Via Del Vallo, 110 - 61100 PESARO - ITALY
Tel. +39 0721 204357- Fax +39 0721 203554
<http://www.codemmusic.com> - E-mail: info@codemmusic.com*

DESCRIPTION

The **MAC 4** is a very compact and innovative two-way active speaker that can ensure an absolute sound quality in any use conditions.

The **MAC 4** incorporates a powerful and reliable **350 Wrms** power amplifier with **MOS-FET** technology designed for making a dynamic and clear sound, along with a music quality without equal.

The dynamics of trasducers is maximized by the **AUDIO SIGNAL PROCESSOR** and the **ELECTRONIC LIMITER** and it at the same time protected from signal peaks and distorsion wich could compromise its lenght.

Thanks to the trasducers quality, the high technological content of its incorporated power amplifier, the **MAC 4** meet the strict demand of PA system and professional monitoring for any musical instrument or genre.

The particular construction of its back part, with two 45° sides allow the **MAC 4** to be used as a monitor.

USE OF BALANCED INPUTS

MAC4 inputs are **BALANCED** type, 3 poles **XLR CANNON** and **JACK stereo**.

Balanced connection is studied to have a better rejection against the noise that wires (if very long) takes from external interferences.

Most of professional audio equipment have balanced outputs, you can use however non balanced connection with mono **JACK** (or 3 poles **CANNON** with **pin 3 connected to pin 1**) the **MAC4** will work normally, but it will be more sensitive to external interferences.

The **JACK** and **CANNON** inputs are connected together (parallel / link).

You can use each one like an input or an output signal for other speaker systems.

USE OF INPUTS LEVEL

Volume knob adjust the input level of the two inputs.

Normally is preferred to take the knob on the **0 dB** level, if you want a higher sensibility you can take the knob to **MAX**.


Electronic internal limiter will always control input level to have a safe operation of the trasducers.

USEFUL TIPS

Thanks to its characteristics you can use **MAC 4** for monitoring and sound diffusion or like sound system for piano-bar and live music.

MAC 4 has been build for vertical, horizontal and 45° installation (like monitor).

On the bottom of the cabinet there is the adapter for speaker stand.

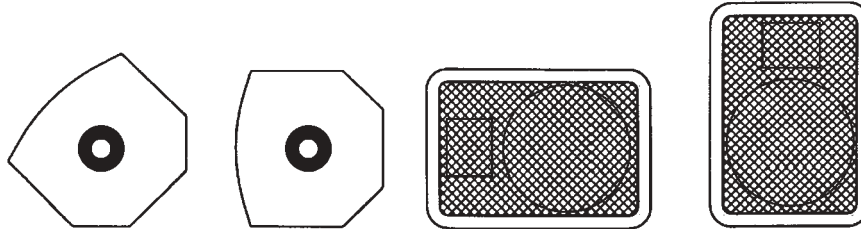

DESCRIPTION OF REAR PANEL

- | | |
|--------------------------------------|---|
| 1) Power switch with lamp (0-1) | 4) Input level adjustment |
| 2) Power supply 220/240 Vac 50/60 Hz | 5) Balanced line input - 3 poles XLR cannon |
| 3) Protection fuse | 6) Balanced line input - stereo jack |

NOTE:

The two inputs are parallel connected together, you can use one for input and the other like an output for other speaker systems.

In case of internal amplifier over-heating, the heat-protection turn off the **MAC4**, when the temperature return to normal level, automatically the protection turn on again the system.

Input level higher than +10 dB can damage the speaker system.

MacPower 4

PROCESSOR CONTROLLED
350 WRMS MOSFET POWER AMPLIFIER
COMPRESSOR/LIMITER

Serial N°

INPUT LEVEL

0 dB
0 MAX

PARALLEL BALANCED INPUTS

+

- gnd

+

- gnd

① **POWER ON/OFF**

② **AC-IN**
220-240 Vac
50/60 Hz

③

Replace fuse with correct type only
Sostituire il fusibile solo con il tipo corretto
4A /250 Vac

Power consumption:
Potenza assorbita:
450W

WARNING
RISK OF ELECTRIC SHOCK DO NOT OPEN

MADE IN ITALY

TECHNICAL SPECIFICATION

Type	Bass - reflex / 2 way
Low frequency section	380 mm (15") high efficiency
High frequency section	1" horn loaded compression driver
Sensitivity 1W/1m	108 dB
Angle of coverage	90° x 75° (horn directivity)
Frequency response	38 - 20.000 Hz
Crossover	18 dB/oct. - Cut freq. 2,2 KHz
Cabinet	High density wood covered with moquette
Dimensions	Cm 68 x 48 x 40 (H - L - W)
Weight	Kg. 33

TECHNICAL SPECIFICATION AMPLIFIER *MacPower 4*

Type	AB class mosfet with audio signal processor
Output power	350 W R.M.S. / 4 Ohm
THD	< 0,1 % a 1 KHz
Frequency response	20 - 50.000 Hz
Balanced inputs	XLRF + stereo Jack in parallel
Input sensitivity	0 dB / -7 dB max
Input impedance	10 KOhm
Protections	Electronic limiter on the input signal (max +10 db) Protection fuse on power supply (1 x 4AF) Double protection fuse on power amplifier (2 x 8AF) Self-resetting thermal fuse on transformer and power amplifier

