



N R G

300

GB USER'S MANUAL

COMPACT BI-AMPLIFIED SPEAKER

230 W RMS MOSFET POWER AMPLIFIER FOR LOW FREQUENCY

70 W RMS MOSFET POWER AMPLIFIER FOR HIGH FREQUENCY

AUDIO PROCESSOR

ELECTRONIC LIMITER

CODEM MUSIC, after the great success had with **MAC** series, come to you with a new range of speakers.

The target was:

- Realize more versatile speakers
- Add highest quality components, give all above inside an extremely elegant design.

The result is **ENERGY Series** :

BI-AMPLIFIED, double amplifier **MOSFET**, **SIGNAL AUDIO PROCESSOR**, electronic **LIMITER**, double active **CROSSOVER**, **MIC-LINE** input.

The boxes, built in poplar plywood covered with moquette, guarantee the best sound expression, lightly and non-deformability, just coming from the strong internal frame.

Thanks to a careful and scrupulous design added to the experience, the **ENERGY** speakers are guarantee of great reliability and top sound expression, the dynamics of each transducer are exalted, protecting it in the same time, from signal peaks or from distortions that might compromised the good working.

Planned and built in accordance with the international safety and electromagnetic compatibility regulations, the speakers had an extremely functional design as a trapezoidal asymmetrical shape; so that can be used as stage monitor. It has ergonomic handles to be carried and a protective metallic grill with a thickness of 1.5 mm that is easily to disassemble. There is the possibility to move horn (square shaped) for a right leak of them in any employment.

USE OF BALANCED INPUTS AND OUTPUTS

NRG 300 inputs and outputs are **BALANCED** type, 3 poles XLR.

Balanced connection is studied to have a better rejection against the noise that wires (if very long) takes from external interferences.

Most of professional audio equipment have balanced outputs, you can use however non balanced connection with **MONO** cable (with XLR pin 3 connected to pin 1) the **NRG 300** will work normally, but it will be more sensitive to external interferences.

The 3 poles XLR inputs and outputs are connected together (parallel / link).

You can use each one like an input or an output signal for other speaker systems.

USE OF INPUTS LEVEL AND KEY MIC/LINE:

Volume knob adjust the input level

The key input sens allows of connect a microphone in the "**MIC**" position. In the position "**LINE**", the **NRG 300** will work normally with inputs at OdB.

Electronic internal limiter will always control input level to have a safe operation of the trasducers.

USE OF KEY GND-LIFT:


Switch for the electrical separation between the ground circuit and the earth circuit; in the "■" position, the input signal ground is electrically disconnected from the earth circuit, in the event the speaker develops a buzz, this position provides for opening the "ground rings," that are often the cause of such interference. In the "■" position, the input signal ground is electrically connected to the device's earth circuit.

USE THE GROUND LIFT FOR BALANCED SIGNALS ONLY.

USEFUL TIPS

Thanks to its characteristics you can use **NRG 300** for monitoring and sound diffusion or like sound system for piano-bar and live music.

NRG 300 has been build for vertical, horizontal and installation like a monitor.

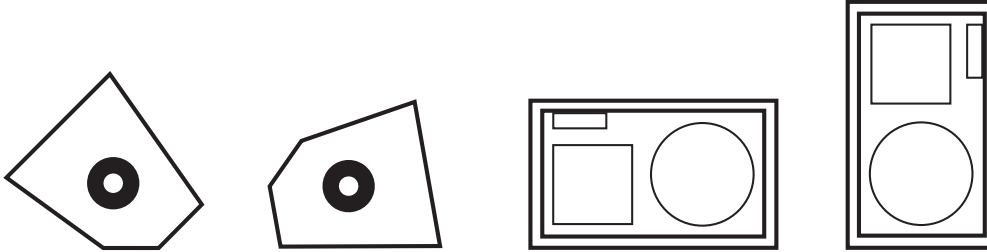

On the bottom of the cabinet there is the adapter for speaker stand.

DESCRIPTION OF REAR PANEL


- 1) Power supply 230 Vac 50 Hz
- 2) Power switch with lamp (0-1)
- 3) Protection fuse
- 4) Balanced line input - 3 poles XLR
- 5) Balanced line output - 3 poles XLR
- 6) Input level adjustment
- 7) key input sens.
- 8) key gnd-lift

NOTE:

The two inputs are parallel connected together, you can use one for input and the other like an output for other speaker systems.

In case of internal amplifier over-heating, the heat-protection turn off the NRG300 when the temperature return to normal level, automatically the protection turn on again the system.

Input level higher than +10 dB can damage the speaker system.

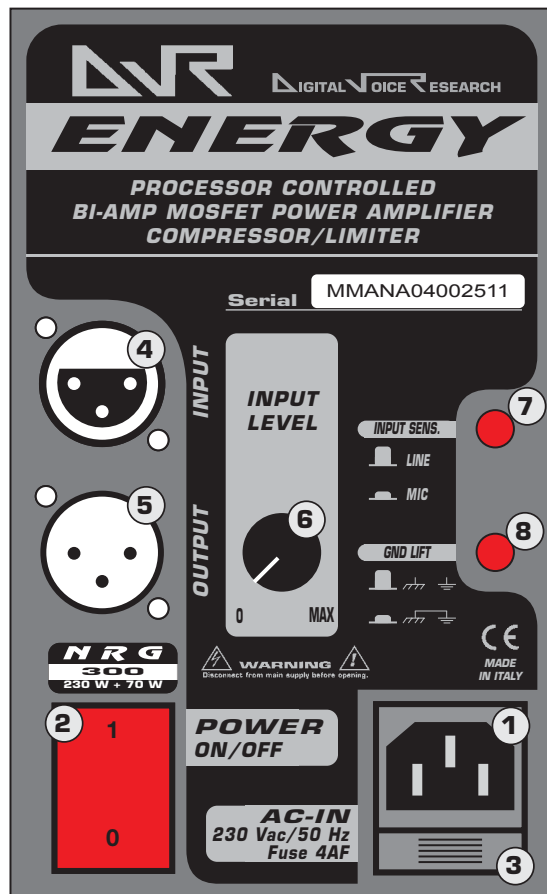

TECHNICAL SPECIFICATION

Type	2 Way
Built-in amplifier	230+70 Wrms
Frequency response	42-20 KHz
Sensitivity (1w/1m)	104 dB
Crossover frequency	1,2KHz/Low 2,5KHz/High
Low frequency woofer	1 x 12"
High frequency driver	1"+HORN
Dispersion	90° x 60°
Input connectors	1 x XLRM Neutrik
Output connectors	1 x XLRM Neutrik
Dimension (H x W x D)	385 x 675 x 375 mm
Net weight	24 Kg

TECHNICAL SPECIFICATION LOW FREQUENCY AMPLIFIER

Type	AB class mosfet with audio signal processor
Output power	230 W R.M.S. / 4 Ohm
THD	0,1 % at 1 KHz
Frequency response	20 - 50.000 Hz
Input sensitivity	0 dB
Input impedance	10 KOhm
Electronic Crossover	Slope 12db/oct
Cut of frequency	1,2KHz

TECHNICAL SPECIFICATION HIGH FREQUENCY AMPLIFIER

Type	AB class mosfet with audio signal processor
Output power	70 W R.M.S. / 4 Ohm
THD	0,1 % at 1 KHz
Frequency response	20 - 50.000 Hz
Input sensitivity	0 dB
Input impedance	10 KOhm
Electronic Crossover	Slope 12db/oct
Cut of frequency	2,5KHz

PROTECTION

Electronic limiter on the input signal (max +10 db)
Protection fuse on power supply (1 x 4AF)
Double protection fuse on power amplifier (2 x 8AF)
Self-resetting thermal fuse on transformer and power amplifier



CODEM MUSIC S.r.l. - Via G.Pierini, 13 - 61100 PESARO - ITALY

Tel. +39 0721 204357 - Fax +39 0721 203554

<http://www.codemmusic.com> - E-mail: info@codemmusic.com